



Scan & Share the page



騰訊微云


YOUKU 优酷 .com



接收十次對比容易打結
 Ten times of recycling comparison, Easy knotting and hidden dangers
 道路滾壓測試
 Road rolling test

重載網線 | HEAVY-DUTY NETWORK CABLE

PAIR WITH PE ARMOR HOLD TWISTED PAIR
 線對配置有PE的冑甲 可以固定線對對絞

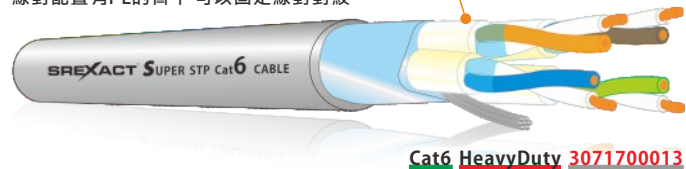

Cat6 HeavyDuty 3071700013



Cat5E HeavyDuty 3071700036

- 具有專利的絞距保護結構
 - 順暢的布放與捲收使用體驗
 - 極高的線纜妥善率(請定期重新製作連接器)
 - 有Cat5E Cat6可選
 - 必須使用該等級的 23AWG(Cat6) 24AWG(Cat5E) STP Rj45 連接器
- Patented twisted pitch protected structure
 - Smooth laying and rolling up experience
 - Extremely high cable availability(please re-create the connector regularly)
 - Available with Cat5E Cat6
 - Must be used with (Cat6) 24AWG (Cat5E) STP Rj45 plug



Twisted pair
 - Wikipedia
TWISTED PAIR OPEN = CABLE ERROR
 雙絞線鬆開過量=等於線纜結構破壞



"A twisted pair variant in which the pairs are individually bonded to increase robustness of the cable. It means the electrical specifications of the cable are maintained despite rough handling."

ITEM NO.型號	3071700036	3071700013
TYPE	HEAVYDUTY SUPER Cat5e 多蕊型/ Stranded conductors	HEAVYDUTY SUPER Cat6 單蕊型/Solid conductors
JACKET COLOR 顏色	ROYAL BLUE	GREY
CONDUCTOR.導體	4PAIR*(7/0.20)	4PAIR*(1/0.56)
JACKET OD.外徑	7.5mm	8.7mm
WIRE INFORMATION 線材資料	[(7/0.2+PE0.99) *1 PAIR + MYLAR+PE2.65]*4+ DW7/0.2TC+AL-FOIL+PVC	[(1/0.56+PE1.1)*1 PAIR+ MYLAR+PE2.7]*4+ DW7/0.20TC+AL-FOIL+PVC
MAIN CONDUCTOR AWG 主要導體直徑	24AWG 0.22mm ²	24AWG 0.246mm ²

ELECTRICAL PERFORMANCE 電氣性能

Cond.D.C.R. ohm/1Km 導體電阻/1km	< 89.3	<72.68
Nom.Cap.(pF/m)between conductors 導體間電容量	< 68.9	<53.7
Nom.Cap.(pF/m) between PAIR-PAIR 線對導體間電容量	< 57.3	<80.1
IMPEDANCE 特性阻抗	100	100
Voltage Breakdown 絕緣承受電壓	300V	300V

MECHANICAL PERFORMANCE 機械性能

Flex Life times load with SVP591L +/-30° 搖晃壽命負載SVP591L 角度+/-30°	>10000	>3000
Tensile Strength (26°C,65%RH)拉伸斷裂力量	>109kgf	--
Applicable Temperature 建議工作溫度	-20°C~ +60°C (-4°F~ +140°F)	-20°C~ +60°C (-4°F~ +140°F)
Peak Temperature 極限工作溫度	-40°C~ +70°C (-40°F~ +158°F)	-40°C~ +70°C (-40°F~ +158°F)
100M weight/100M 重量(kg)	6.4	8