


For AUDIO




- TO:
- ACTIVE SPEAKER
 - AMPLIFIER & SPEAKER
 - MONITOR EARPHONE AMPLIFIER
 - OTHER PRE AMPLIFIER

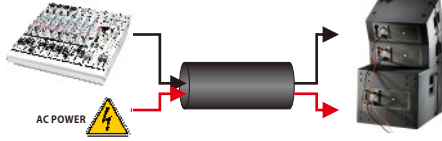

SKC896-BP14-3P-EU

本系列XLR母頭端 標準配置電源公頭
或 -FB 灰色電源接頭
This series of XLR female end
standard configuration
power male or -FB power connector

BIG Power SMALL Out Diameter STAR QUAD Signal Cable

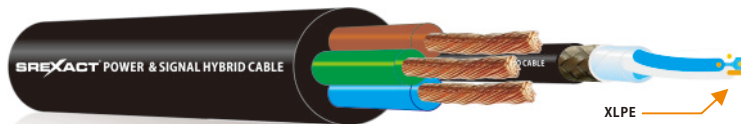

STARQUAD 14AWG 3071500029
[(16/0.12+XLPE1.)*4C+NYLON FIBER+AL-FOIL+BD16*5/0.10TC+PVC5.2]+41/0.254BC+PVC3.3)*3C+PVC11.5

“熊掌型”布局,線纜體積大幅下降!
使用抗干擾性能較好的星絞線做為信號線使用
The brand-new "paws type" layout, making cable volume dropped significantly!
and did an optimized treatment on signal cable, adopting star-quad cable with better
anti-interference performance as signal cable used.
Taking into consideration the big current on active speaker.

In addition, AES/EBU grade twisted pair signal line can be selected, which has the advantages
of high sound attenuation and accurate digital signal transmission.
另外可選擇 AES/EBU 等級雙絞型信號線 具有高音衰減少 數位信號傳輸準確的優點

Better choice AES signal cable
更好的選擇 AES 信號線

SKC896V-A-BP14-3P-EU

- Connector type, see the Power connector series list
- 3P XLR connector pin
- 14 14AWG or cable's item final 4 number
- BP bear paw type
- A AES/EBU
- V SVP555V+SVP556V XLR connector

SKC896 hybrid cable series item

TYPE	ITEM	CABLE ITEM	XLR1 POWER IN			XLR2 POWER OUT			POWER RATED			
			AMP	110V WATT	220V WATT	AMP	110V WATT	220V WATT	AMP	110V WATT	220V WATT	
AUDIO	SKC896V-BP10 (6mm)	3071500029	SVP555V-3P	MALE	SVP556V-3P	FEMALE	32A	3520W	7040W			
AUDIO	SKC896V-BP14	3071500029	SVP555V-3P	MALE	SVP556V-3P	FEMALE	15A	1650W	3300W			
AUDIO	SKC896V-BP16	3071500037	SVP555V-3P	MALE	SVP556V-3P	FEMALE	11A	1210W	2420W			
AUDIO	SKC896V-BP18	3071500038	SVP555V-3P	MALE	SVP556V-3P	FEMALE	7.5A	825W	1650W			

HYBRID CABLE DATA

AES/EBU **ANALOGY**

POWER CONNECTOR OPTIONAL TYPE

15A/16A
32A

*-CH MAX:10AMPS
*-AUS MAX:10AMPS