



REVISIONS			
ISS	ZONE	DESCRIPTION/PER REQUEST	DATE
A3	ALL	修改品名,修改為L把手和彩色尾套的標準品	
V	OPEN	對客戶公開圖紙	
	OPEN	對供應商公開圖紙	
	CLOSED	僅限廠內使用	

BRIDGACT Professional Multipair Snake Cable 12 Pair

台灣日昇電子股份有限公司
ISSUE APPROVED
 發行核可
本文件與簽核紙本正本相符

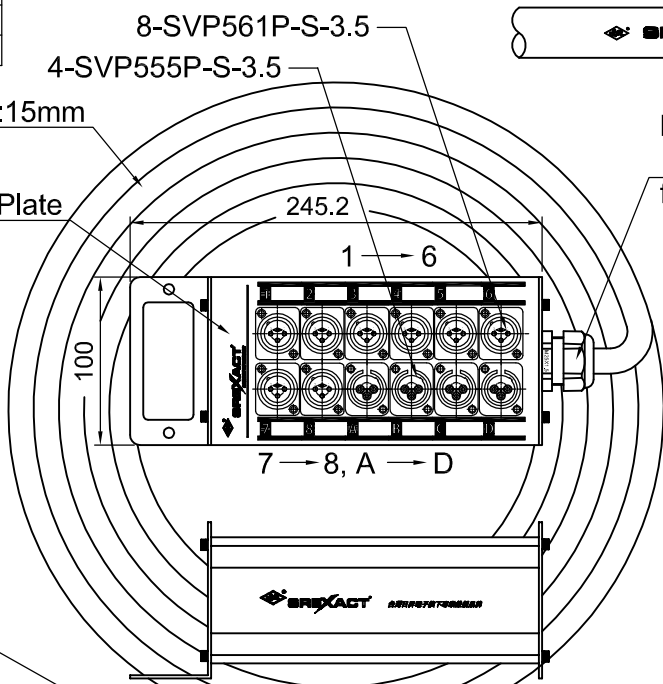


Plastic gland(塑膠固定頭)
 Thread(螺牙)M25x1.5
 for cable OD.:13~18mm
 (適用線徑 ϕ 13~18mm)
 Cable No.: 4107010129
 (3070800820-01)

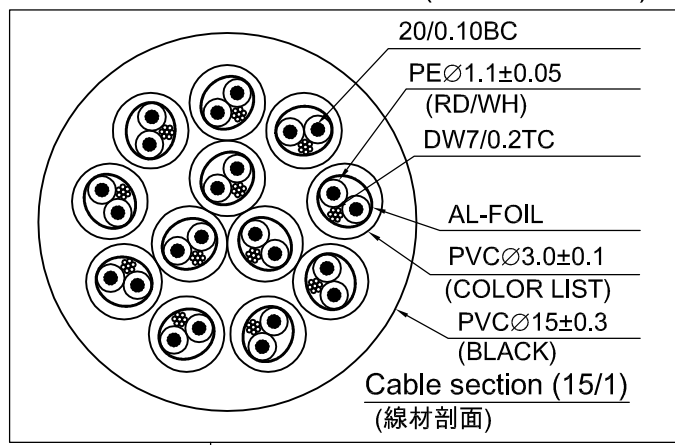

色彩型號 (COLOR LIST)

棕	紅	橙	黃	綠	藍	紫	灰
BR	RD	OR	YL	GN	BL	PL	GY
1	2	3	4	5	6	7	8
A	B	C	D				


8-SVP555S-BK(彩色螺套)

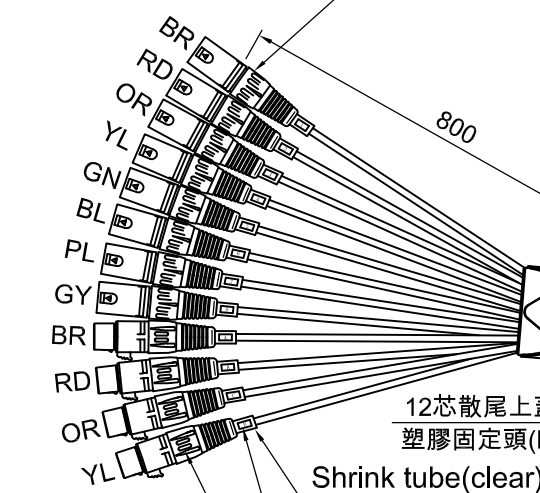

4-SVP555S-BK (A~D)(彩色螺套)
 Shrink tube(clear)
 透明熱縮套管 ϕ 10x80
 Number label
 (號碼圈1~8, A~D)
 用於 ϕ 6的線

Notes(備註):

- Cable storage and fixed installation, please refer to the instruction of cable storage diagram. (線材收容與固定安裝使用,請參考線材收納示意圖說明)
 - The inspection principles of product quality:
 - 1-1. Cable production is all conduction
 - 1-2. Pull the cable to confirm it is firmly after welding (本產品品質檢驗原則: 1-1. 線纜生產全導通 1-2. 焊接後拉扯確認牢固)
- ★The drawing is based on the standard spec. ,pls check "xM" for various length requirement. (此圖為標準品繪製,由於長度多種變化不另行標示,產線依照訂單長度製作。) 1FT=0.3048M, 1inch=0.0254M

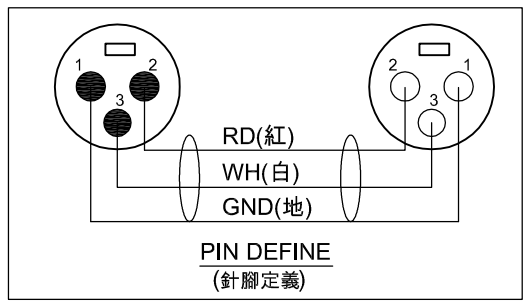

DIMENSIONS ARE IN MILLIMETERS		APPROVED	DATE
UNLESS OTHERWISE SPECIFIED TOLERANCES		吳碧珊	2022-04-15
ANGLES = $\pm 5^\circ$		CHECKED	DATE
UP TO 6 = ± 0.2			
6-40 = ± 0.4		DRAWN	DATE
40-120 = ± 0.6		吳碧珊	2022-04-15
120-315 = ± 1		FILE NO.	D:\CAD\SBC\5204010273_
ABOVE 315 = ± 1.6			SBC-2TH-12X4-RW-30M_CA001A3
THIRD_ANGLE	ϕ \square	ERP LINK:	5204010273
SCALE	1/4.5		

SUNRISE 日昇電子股份有限公司
 SUN RISE EXACT INDUSTRIAL CO.

TITLE
 Stage Box with Cable (12ch) With handle type
 8*XLR MALE+ RETURN 4*XLR FEMALE (L=30M/xM)

PART NO. SBC-2TH-12X4-RW-30M REV. A3