


40A High Current Speaker Connector

10AWG 6mm² Cable
Low Contact Resistance 2mΩ
Optimized for Loudspeaker Applications

- Wear-resistant and dimensionally accurate Zinc Die-cast shell, effectively reduce the abrasion of connector.
- Reliable and low-oxidation soldering.

Solder Type



40A Loading Watt, Amp, Volt			
Resistance	Watt	Amp	Volt
2ohm	3200	40	80
4ohm	6400	40	160
8ohm	12800	40	320



Please turn off power then remove connector. This type of connector should not be shut down while connecting power.

We strongly recommended using SUNRISE XLPE speaker cable, can withstand high temperature solder.

In Line

Left-hand Thread, 4P
Drop Resistant Nylon Cap
TPR Sleeve Prevents Water From Entering

Male
SVP563LTX
Bronze Pin




Female
SVP562TX
Anti Loose Push Button, Brass Pin




Socket

PA 66 + 30% GR Back Cover, 4P
Silver Plated Pin, Hole: 29.2*29.2mm, Size: 38*38mm

Male SVP563TZ

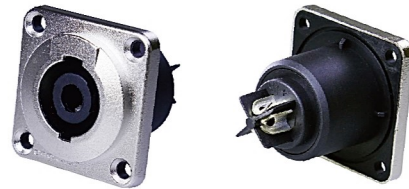

Female SVP562TZ

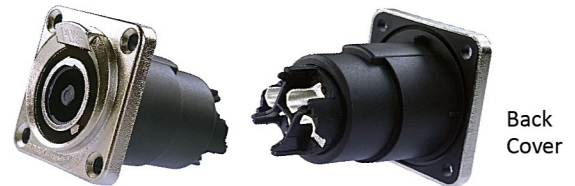


35A Female In Line Shark Series Speaker Connector

SVP562X-Q
Terminal or Solder Assembly
Tin Plated Pin, 4P



45° Shell Lock

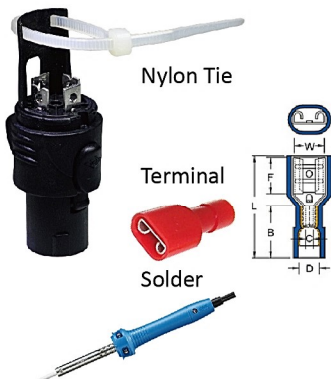

Boot

- 7 Colors, Default is Orange
- Available in Ø 6.8 and 10.8mm



25A Male In Line Speaker Connector

Extension SVP563L-M-P
6.3mm Terminal or Solder Assembly
Assembled Shell & Cable Grip
With Metal Flange
Ø 5~10mm, 4P



Dual Male Adaptor SVP563MM-Q
With Metal Flange, 4P



Front

Rear