

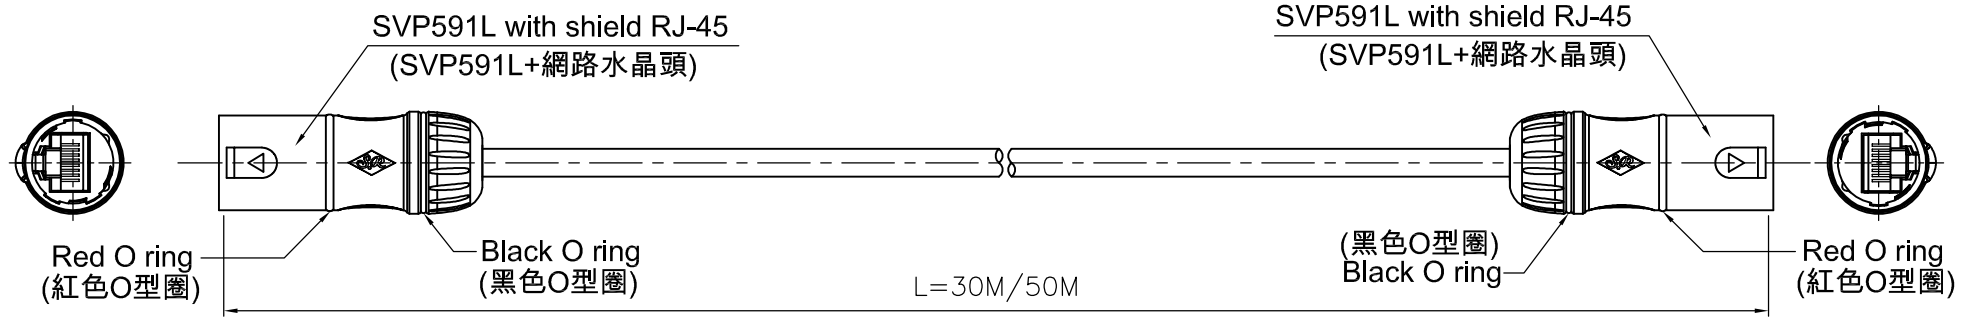
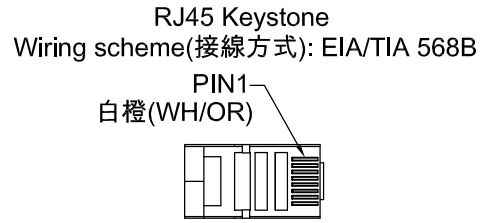


REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
V	OPEN	對客戶公開圖紙
	OPEN	對供應商公開圖紙
	CLOSED	僅限廠內使用

台灣日昇電子股份有限公司  
**ISSUE APPROVED**  
 發行核可 本文件與簽核紙本正本相符

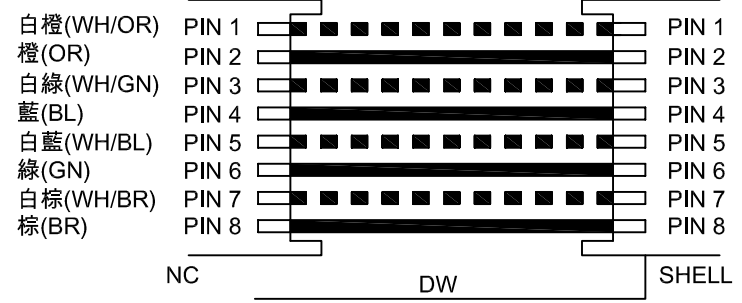

CABLE NO.: 4117010002  
 (3071700001-01)

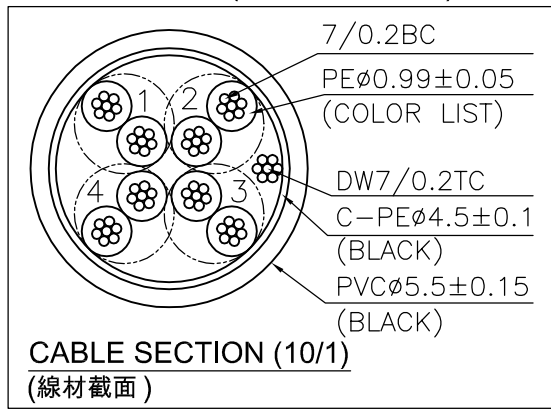

- Notes(備註):
1. Push button with a flower logo (按鍵上有花型商標)
  2. The ground wire of one cable end should. (線材一端地線要連接到RJ45水晶頭的屏蔽外殼上)
  - ★ 3. C-PE belongs to semiconductor material, before welding must strip off cleanly. (C-PE為半導體材質, 焊接前務必剝除乾淨)

Color List (色彩列表)

- 4 Pair twisted wires (4對雙絞):
1. 橙-白/橙 (Orange-White/Orange)
  2. 藍-白/藍 (Blue-White/Blue)
  3. 綠-白/綠 (Green-White/Green)
  4. 棕-白/棕 (Brown-White/Brown)

ERP link(品號)	Part No.(品名)
5221011148	SVC775SSL-001-30M
5221011147	SVC775SSL-001-50M

DIMENSIONS ARE IN MILLIMETERS	APPROVED  DATE 2021-11-05
UNLESS OTHERWISE SPECIFIED TOLERANCES	CHECKED DATE
ANGLES = ±5°	DRAWN 吳碧珊 DATE 2021-11-03
UP TO 6 = ±0.2	FILE NO. D:\CAD\SVCI\5221011148_
6-40 = ±0.4	SVC775SSL-001-30M_CA001A1
40-120 = ±0.6	ERP LINK: 5221011148
120-315 = ±1	
ABOVE 315 = ±30	
THIRD_ANGLE	
SCALE 1/1.5	

日昇電子股份有限公司 SUN RISE EXACT INDUSTRIAL CO.	
TITLE SVP591L+3071700001+SVP591L CABLE ASSEMBLY (L=30M/50M)	
PART NO. SVC775SSL-001-30M	REV. A1