


Non-Twisted Speaker Cable 直放型喇叭線

2C OFC



6C OFC

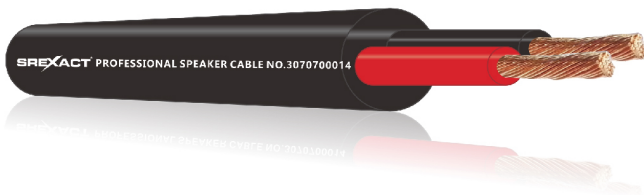

Core 芯數	Main Conductor 主要導體截面積 AWG	mm ²	Item No. 型號	Conductor 導體	Jacket OD(mm) 外徑	Cond.D.C.R. ohm/1km 導體電阻	Capacitance(pF/m) between Conductors 導體間電容值	Jacket Color 外被顏色	Voltage Breakdown 絕緣承受電壓
2C OFC	12	3.294	3070700014	65/0.254	9	5.43	143.09	Black	600V
		2.5	3070700142	50/0.254	8.3	7.8	131.2		
	14	2.077	3070700015	41/0.254	8.0	8.62	123.5		
		1.5	3070700147	30/0.254	7.2	12.6	113.2		
	16	1.307	3070700016	65/0.16	7.0	13.7	106.5		
	17	1.045	3070700017	52/0.16	6.5	17.2	103		
4C OFC	18	0.824	3070700018	41/0.16	6.0	21.8	101.2	Black	600V
	20	0.522	3070700024	26/0.16	5.5	34.6	57.4		
	12	3.294	3070700019	65/0.254	11	5.43	143.09		
		2.5	3070700159	50/0.254	10	7.8	131.2		
	14	2.077	3070700020	41/0.254	10	8.62	123.5		
		1.5	3070701820	30/0.254	9.0	12.6	113.2		
6C OFC	16	1.307	3070700021	65/0.16	9.0	13.7	106.5	Black	600V
	17	1.045	3070700022	52/0.16	8.0	17.2	103		
	18	0.824	3070700023	41/0.16	7.0	21.8	101.2		
	12	3.294	3070700150	65/0.254	13.5	5.43	143.09		
		2.5	3070700157	50/0.254	12.5	7.8	131.2		
	14	2.077	3070700151	41/0.254	12.0	8.62	123.5		
8C OFC		1.5	3070701830	30/0.254	11.0	12.6	113.2	Black	600V
	16	1.307	3070700152	65/0.16	10.5	13.7	106.5		
	12	3.294	3070700153	65/0.254	15	5.43	143.09		
		2.5	3070700156	50/0.254	14	7.8	131.2		
	14	2.077	3070700154	41/0.254	13	8.62	123.5		
		1.5	3070701840	30/0.254	12	12.6	113.2		
	1.307	3070700155	65/0.16	11.5	13.7	106.5			

※ 12, 16C by order. 12及16C線纜可以被訂做。

Mechanical Performance 機械性能

Flex Life Number of Times load 500g+/-30° 搖晃壽命次數負載 500g 角度 +/-30°	3070700015>3700	3070700020>9960
Tensile Strength (26°C, 65%RH) 拉伸斷裂力量	3070700015>68kgf	3070700020>71kgf
Applicable Temperature 建議工作溫度	-20°C~ +60°C(-4°F~ +140°F)	
Peak Temperature 極限工作溫度	-20°C~ +70°C(-4°F~ +158°F)	

※ Electrical performance may have manufacturing tolerances and measurement errors. At the time of editing, every effort has been made to ensure its authenticity.
電氣性能可能存在製造公差與量測誤差；本資料在編輯時已盡力保證其真實性。