


Shield Twisted Pair Speaker Cable for Installation 固定安裝用有屏蔽對絞型喇叭線.



Non-Plenum Twisted Pair Speaker Cable 中空對絞型喇叭線

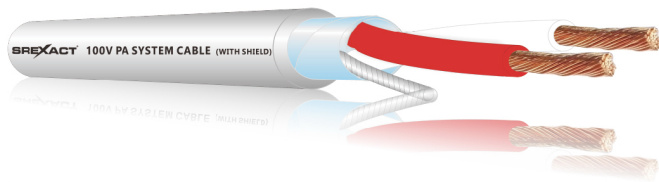

Shield Twisted Pair Speaker Cable for Installation 固定安裝用有屏蔽對絞型喇叭線

Main Conductor 主要導體截面積	Item No.	Jacket Color	Conductor	Jacket OD(mm)	Cond.D.C.R. ohm/1km	Capacitance(pF/m) between Conductors	Voltage Breakdown
AWG	mm ²	型號	導體	外徑	導體電阻	導體間電容值	絕緣承受電壓
1.5	307070201H	Black	30/0.254	7.2	12.5	84.93	Must withstand at DC 500V/15sec
1.5	3070700201	Gray	30/0.254	7.2	12.5	84.93	
16	3070700235	Gray	7*24/0.10	7.0	13.7	80.53	
16	3070700202	Gray	65/0.16	7.0	13.7	80.53	
18	3070700049	Gray	73/0.12	6.0	21.8	73.75	
18	3070701850	Gray	41/0.16	6.0	21.8	73.75	
20	3070701860	Gray	26/0.16	5.5	34.6	61.07	

Non-Plenum Twisted Pair Speaker Cable 中空對絞型喇叭線

Main Conductor 主要導體截面積	Item No.	Jacket Color	Conductor	Jacket OD(mm)	Cond.D.C.R. ohm/1km	Capacitance(pF/m) between Conductors	Voltage Breakdown	
AWG	mm ²	型號	導體	外徑	導體電阻	導體間電容值	絕緣承受電壓	
12	3.235	3070700009	White	65/0.254	9.5	5.43	Must withstand at DC 500V/15sec	
2.5	3070700148	White	50/0.254	8.7	7.5	131.2		
14	2.077	3070700010	White	41/0.254	8.5	8.62		123.5
1.5	3070700149	White	30/0.254	7.8	12.5	113.2		
16	1.307	3070700011	White	65/0.16	7.5	13.7		106.5
17	1.045	3070700012	White	52/0.16	7.0	17.2		101.2
18	0.824	3070700013	White	41/0.16	6.5	21.8		57.4
20	0.522	3070700026	White	26/0.16	6.0	34.6		49.1

Item No. 型號 Wire Information 線材資料

307070201H	30/0.254	+DW7/0.16TC+AL-FOIL+Black PVC
3070700201	30/0.254	+DW7/0.16TC+AL-FOIL+Gray PVC
3070700235	7*24/0.10	+DW7/0.16TC+AL-FOIL+Gray PVC
3070700202	65/0.16	+DW7/0.16TC+AL-FOIL+Gray PVC
3070700049	73/0.12	+DW7/0.16TC+AL-FOIL+Gray PVC
3070701850	41/0.16	+DW7/0.16TC+AL-FOIL+Gray PVC
3070701860	26/0.16	+DW7/0.16TC+AL-FOIL+Gray PVC
3070700009	65/0.254	+Black/Red PVC+PVC Jacket
3070700148	50/0.254	+Black/Red PVC+PVC Jacket
3070700010	41/0.254	+Black/Red PVC+PVC Jacket
3070700149	30/0.254	+Black/Red PVC+PVC Jacket
3070700011	65/0.16	+Black/Red PVC+PVC Jacket
3070700012	52/0.16	+Black/Red PVC+PVC Jacket
3070700013	41/0.16	+Black/Red PVC+PVC Jacket
3070700026	26/0.16	+Black/Red PVC+PVC Jacket

Mechanical Performance 機械性能

Flex Life Number of Times load 500g+/-30° 搖晃壽命次數負載 500g 角度 +/-30°	Only for Installation
Tensile Strength (26°C, 65%RH) 拉伸斷裂力量	---
Applicable Temperature 建議工作溫度	-20°C~ +60°C(-4°F~ +140°F)
Peak Temperature 極限工作溫度	-20°C~ +70°C(-4°F~ +158°F)

※ Electrical performance may have manufacturing tolerances and measurement errors. At the time of editing, every effort has been made to ensure its authenticity.
電氣性能可能存在製造公差與量測誤差；本資料在編輯時已盡力保證其真實性。