REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE
A5	A-2	增加印字尺寸,長度250M,修改纜車外觀,改芯線尺寸
V	OPEN	對客戶公開圖紙
	OPEN	對供應商公開圖紙
	CLOSED	僅限廠內使用

SREXACT 62.5/125um ARMORED FO CABLE 6C ***M

台灣日昇電子股份有限公司
ISSUE APPROVED
發行核可
本文件與簽核紙本正本相符



Connector (2/1)
(連接器)

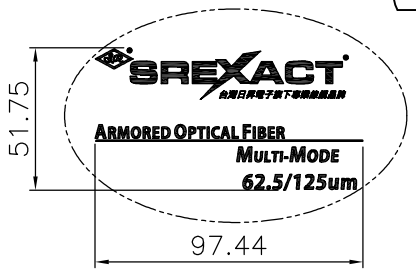

Printed enlarged (2/1)
(印字放大圖)



0.25mm colored fiber cable x 6C
(0.25mm 著色光纖x6芯)
(Aramid Fiber: 10 strands x1100D)
(芳綸纖維: 10股x1100D進口)
(Fiber Inner Jacket Material: PVC)
(光纖內護套: 材質聚氯乙烯)
(Armoured Spiral OD:2.8mm,
Signal thickness: 0.3mm)
(螺旋鋼帶鎧裝: 外徑2.8mm,黑色)
(單邊壁厚: 0.3mm)
(Metal Braid: Covered upon 50%)
(金屬編織網: 覆蓋率50%以上)
(Fiber Jacket Material: PU OD:5.0mm)
(光纖外護套: 聚氨脂, OD.:5.0mm)
BLACK(黑色)

Cable Section (30/1)
(線材剖面)

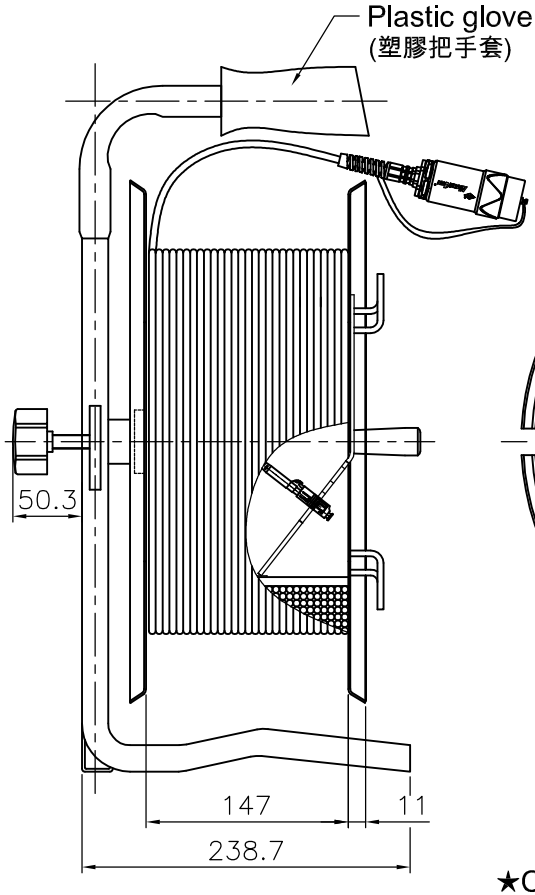

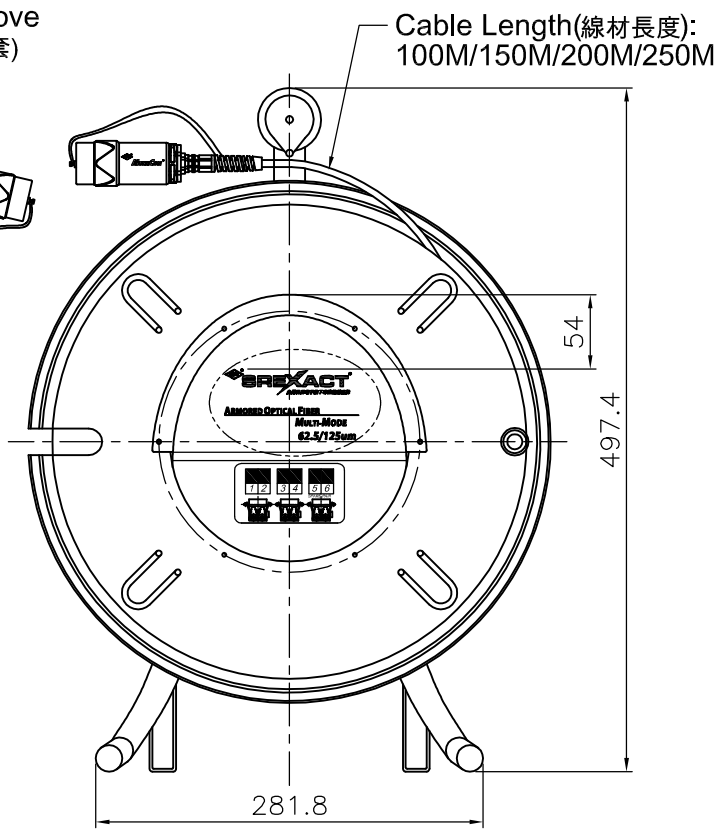

Note(備註):
★1. Include 14 pcs 2M LC-LC patch cable in box
(收容盒內附上14條2M LC-LC之跳線)

★Cable assemblies and plate: LC type connector
(接頭與面板上皆為LC接頭)

ERP link (品號)	Part No.(品名)
5203050042	SFH-6M6A-LCB-100M
5203050031	SFH-6M6A-LCB-150M
5203050029	SFH-6M6A-LCB-200M
5203050075	SFH-6M6A-LCB-250M

DIMENSIONS ARE IN MILLIMETERS	APPROVED 高碧珊	DATE 2018-06-20	日昇電子股份有限公司 SUN RISE EXACT INDUSTRIAL CO.
UNLESS OTHERWISE SPECIFIED TOLERANCES ANGLES = ±5° UP TO 6 = ±0.2 6–40 = ±0.4 40–120 = ±0.6 120–315 = ±1 ABOVE 315 = ±1.6	CHECKED	DATE	
	DRAWN 吳碧珊	DATE 2018-05-30	TITLE: SDC RH380-U4 WITH MULTI-MODE OPTICAL FIBER CABLE (L=100/150/200/250M)
	FILE NO. D:\CAD\SFH\5203050029_ SFH-6M6A-LCB-200M_CA001A5		
THIRD_ANGLE	ERP LINK: 5203050029	PART NO. SFH-6M6A-LCB-200M	REV. A5
SCALE 1/5.5			