

## Power Cord

**SC501-32HCHC-6-□M**  
32A 6mm<sup>2</sup> 3C IEC53 RVV Cable  
**SC501-32HCHC-4KYJV-□M**  
32A 4mm<sup>2</sup> 3C KYJV XLPE Cable



**SC501-AUS-□M**  
● For Australia and China.  
● Extension cord plug with rear socket.



**SC502-CHTHRU-□M**  
● For Australia and China.  
● Extension cord plug with rear socket.



**SC501-32CEEHC-6-□M**  
32A 6mm<sup>2</sup> 3C IEC53 RVV Cable  
**SC501-32CEEHC-4KYJV-□M**  
32A 4mm<sup>2</sup> 3C KYJV XLPE Cable



## DMX Adaptor




**SVP559-3F5M**  
Female XLR 3P  
to Male XLR 5P

**SVP559-5F3M**  
Female XLR 5P  
to Male XLR 3P

**SVP557-5**  
Female XLR 5P  
to Female XLR 5P


**SVP558-5**  
Male XLR 5P  
to Male XLR 5P

**SC7102S-DMX**  
0.2m, Male XLR 5P to Female XLR 3P\*2  
● For Avolites console output.

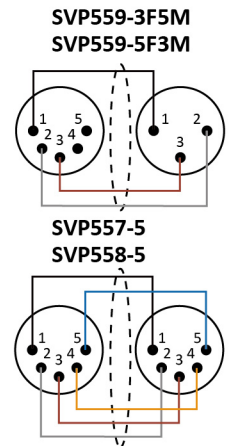


## 110ohm DMX Terminator

**SVP555S-BK-3P110**  
Male XLR 3P



**SVP555S-BK-5P110**  
Male XLR 5P

**SVP558-35-110**  
Male XLR 3, 5P  
● For light system close loop.



Power Cord Item No. Rule:

① - ② ③ - ④ ⑤ - ⑥

	Remark	Define
①	SC501	Power Cord
②	32	32 AMP
③		Power Connector Type
④	(Default)	1.5 15
	0.75	0.75 18
	1	1 17
	2	2 14
	2.5	2.5 13
	4	4 11
⑤	(Default)	IEC53 RVV Cable
	KYJV	KYJV XLPE Cable
⑥		Length

Example:

SC501 - 32 CEEHC - 4 KYJV - 20M

③ Power Connector Type Remark

HCHC: SVP592L-HC to SVP592L-HC  
CEEHC: CEE Male 3P to SVP592L-HC  
US: US IEC to SVP592FA-BL  
UK: UK to SVP592FA-BL  
AUS: AUS to SVP592FA-BL  
CH: China to SVP592FA-BL  
EU: EU to SVP592FA-BL  
FWMI: SVP598F-W to SVP598M-I  
FWFB: SVP598F-W to SVP592FB-GY  
592: SVP592FA-BL to SVP592FB-GY  
BB: SVP592FA-BL to SVP592FA-BL