Network Cable

Cable Type								
Item No.	Class		Jacket Color	Item No.	Class		Jack Color	
3071700048	Cat6A		Purple	3071700036	Cat5E	Heavy Duty	Royal Blue	
3071700047	Cat6	Low Skew Delay	Sky Blue	3071700001	Cat5E	Soft Type	Black	
3071700013	Cat6	Heavy Duty	Gray					

Why should you choose "Heavy Duty Cable"?

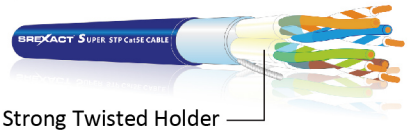

Cat6A STP RJ45

SVC775SSX-048-□M
Length Max: 100m
With 23AWG Cat6A Plug
※ Shell Type: SVP591X on both sides.

Cat6 STP RJ45 Low Skew Delay
AES50 / MADI ESD & SYNC Solution Product

SVC775SSX-047-□M
Length Max: 100m
※ Dual terminal all ground.
※ Shell Type: SVP591X on both sides.

Outdoor Road Rolled Testing

Cat6 STP RJ45 Heavy Duty

SVC775SSL-013-□M ※ Shell Type: SVP591L on both sides.
SVC775SSX-013-□M ※ Shell Type: SVP591X on both sides.
Length Max: 100m

SVP591L

Cat5E STP RJ45 Heavy Duty

SVC775SSL-036-□M
Length Max: 80m
※ Shell Type: SVP591L on both sides.

Cat5E STP RJ45 Heavy Duty

SVC775SSX-036-□M
Length Max: 80m
※ Shell Type: SVP591X on both sides.

Item No. Rule:

①	②	③	-	④	-	⑤
SVC775	SS	X	-	013	-	100M

Example

	Remark	Define		
①	SVC775	Network Cable		
			Shell A	**Shell B**
②	(Default)	STP RJ45	---	---
	S		SVP591□	---
	SS		SVP591□	SVP591□
	U	UTP RJ45	---	---
	US		SVP591□	---
	USS		SVP591□	SVP591□
③	(Default)	RJ45 Shell Type	SVP591	
	L		SVP591L	
	X		SVP591X	
	-BK		SVP591-BK	
④		Cable Item No. Final 3 Number		
⑤		Length		

STP RJ45

BT: Blue connector tube, only for without shell type.
(Default and U, Default: SVC775-BT, U: SVC775U-BT)
BKT: Black connector tube.

SVP591L
Perfect Match
Fast Conversion

SVP591X

SVP591

Network Cable

Soft and Easy to Retract
Stranded Copper Wire
With Ground Wire
Reasonable Twist

Cat5E STP RJ45 Soft Type
3071700001 Cable

SVC775SSL-001-□M
Length Max: 60m
※ SVP591L on both sides.

SVC775-001-□M
Without Shell Type
Length Max: 60m

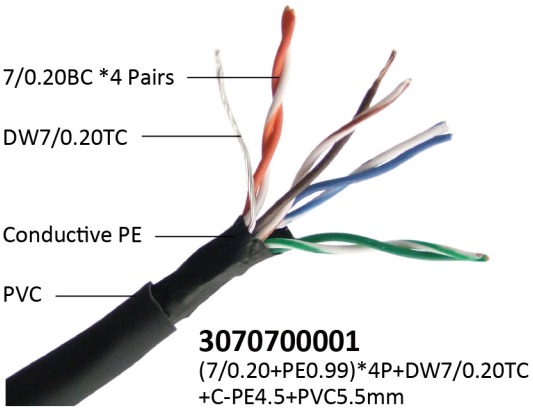

3070700001
(7/0.20+PE0.99)*4P+DW7/0.20TC
+C-PE4.5+PVC5.5mm

For Personal Monitor

※ The copyright of the images belongs to LiveMix, AVIOM, Allen & Heath, MyMix,
※ EliteCore, Roland, Behringer, dbx and MIDAS.

LiveMix CS-DUO

AVIOM A-16II

Allen & Heath ME-1

MyMix

Elite Core PM-16

Roland M-48

Behringer P16

dbx PMC16

Normal Network Cable

SUNRISE Network Cable

MIDAS DP48

※ MIDAS DP48 must use full-metal shell cable assembly SVC775SSX-□M.

※ Notices:
In order to ensure the stability of the main line, CONSOLE Connect HUB4 or the first DP48 using SVC775SSX-047-□M is a better choice

Cat5E STP RJ45 Adaptor

SVC776-C5ESTP-0.5M
RJ45 Male Plug to Female Socket with Locker.