


## DMX-512 Over Network Cable Adaptor

- We therefore offer this program, through both ends converter, to use a network cable in the middle, as 4 channels DMX-512 multi-cable in usage.
- As network cable is a cheap cable and accurate, to match the advantages of 110ohm impedance characteristics. Also it has interoperability with current mainstream network audio transmission, reducing the cost of backup cable.
- Recommending to use STP network cable, to provide with better shield. Using high-quality Cat5E network cable can be more efficiently provided with stable transmission distance around 200m. (Depending on the quality of cable and characteristics.)

### SKC-4MVBKDMX-0.6M

Male XLR 3P\*4 to RJ45 Socket, 0.6m


- ※ XLR Type: SVP555V-BK
- ※ Comply with AES72-2019 type 1E standard.
- ※ SKC-4MVBKDMX-5P-0.6M is XLR 5P model.

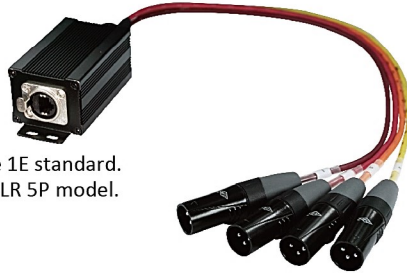

### SKC-4FVBKDMX-0.6M

Female XLR 3P\*4 to RJ45 Socket, 0.6m

- ※ XLR Type: SVP556V-BK
- ※ Comply with AES72-2019 type 1E standard.
- ※ SKC-4FVBKDMX-5P-0.6M is XLR 5P model.

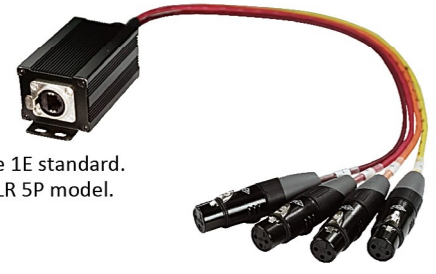

### SKC-2MVBKDMX-5P-0.6M

Male XLR 5P\*2 to RJ45 Socket, 0.6m

- ※ XLR Type: SVP555V-BK
- ※ XLR A = CH1 + 2, XLR B = CH3 + 4



### SKC-2FVBKDMX-5P-0.6M

Female XLR 5P\*2 to RJ45 Socket, 0.6m

- ※ XLR Type: SVP556V-BK
- ※ XLR A = CH1 + 2, XLR B = CH3 + 4



### Soft Network Cable 3071700001

A. + B. + C.

For 4 Pairs, Total 100m

SKC-DMX-XE10G-V-100M


- ※ Waterproof Network Connector: SVP555X-WP-E10-PG + SVP556X-WP-E10-PG
- ※ DMX Connector: SVP555V\*4 + SVP556V\*4

B.

For Extend, 100m

SVC-775XE10-100M

- ※ Waterproof Network Connector: SVP555X-WP-E10-PG + SVP556X-WP-E10-PG

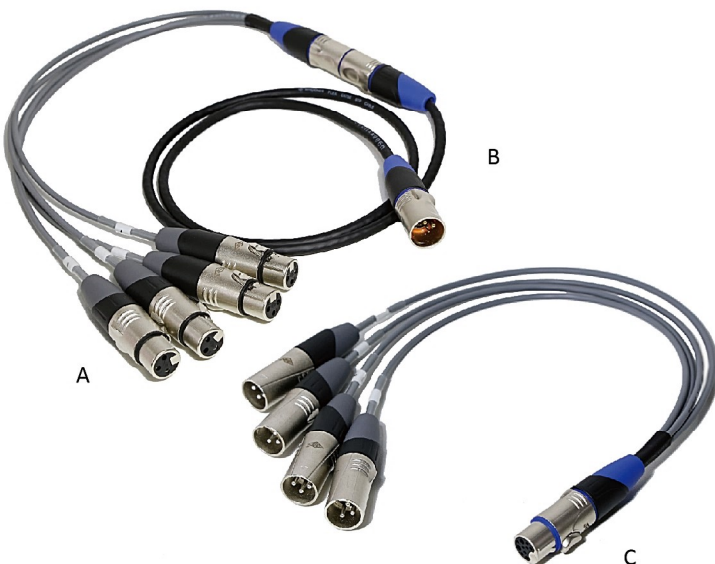

### SGB-RZ4M

Male XLR 3P\*4 to RJ45 Socket

RJ45 In & Parallel with GND Lift Switch

- ※ SGB-RZ4M-5P is XLR 5P model.



GND Lift Switch



### SGB-RZ4F

Female XLR 3P\*4 to RJ45 Socket

RJ45 In & Parallel with GND Lift Switch

- ※ SGB-RZ4F-5P is XLR 5P model.



GND Lift Switch

