


Network DMX-512 + Power Cord Hybrid Cable

- Network hybrid cable is best choice for MA-NET, Artnet and
- multi-channel DMX. Through the RJ45 adapter cable, 4 pairs
- of DMX-512 signals can be converted.

Cat6A STP RJ45 Bear's Palm Type - FPE Black

Item No.	AWG mm ²	Cable Item No.	Network Cable	Power Connector Type	Power Rating		
					Amp	110V Watt	220V
SKC898X-049-EU-10M	2.5mm ²	3071500049	Cat6A SFTP Class SVP591X Shell on Both Sides	EU Standard Connector	20A	2200W	4400W
SKC898X-050-EU-10M	14AWG	3071500050			15A	1650W	3300W
SKC898X-051-EU-10M	1.5mm ²	3071500051			11A	1210W	2420W
SKC898X-052-EU-10M	16AWG	3071500052			10A	1100W	2200W



3071500049 16.0mm | 3071500051 15.0mm
3071500050 15.5mm | 3071500052 15.0mm

- Power cord without separate sheath, small cable size.

Item No. Rule:

Example:

① - ② - ③ - ④ - ⑤ SKC896D - 072 - V3P - FW/MI - 5M

	Remark	Define	Note			
①	SKC896D	DMX-512 + Power Cord Hybrid Cable	---			
	SKC898	Network DMX-512 + Power Cord Hybrid Cable		RJ45 Without Shell		
	SKC898L			RJ45 With SVP591L		
	SKC898X			RJ45 With SVP591X		
②		Cable Item No. Final 3 Number	---			
③	XLR Connector Type	Male	Female	Pin	For SKC896D.	
		3P	SVP555S	SVP556S		3
		5P				5
		C3P	SVP555SC	SVP556S		3
		C5P				5
		V3P	SVP555V	SVP556V		3
		V5P				5
X3P	SVP555X-WP	SVP556X-WP	3			
X5P			5			
④		Power Connector Type	---			
⑤		Length: 1.5~30m	---			



Bear Palm Type
Need use Bifurcation Structure
Except EUSK16E1



④ Power Connector Type Remark

US IEC 15A

UK 16A


AUS 10A (For AUS/China)

China 10A (For AUS/China)

EU 16A



Other Options

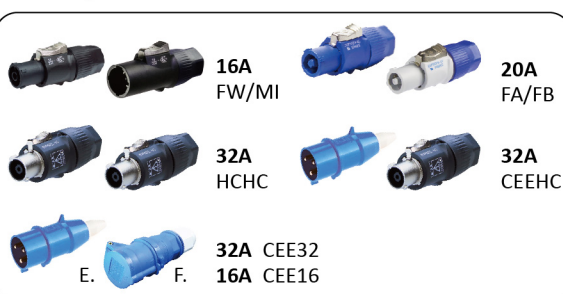

A. IEC C13
B. 3P-10G-1
C. Schuko Plug
D. 3P-16E-1
E. CEE Male 3P
F. CEE Female 3P

FW: SVP598F-W
MI : SVP598M-I
FA : SVP592-FA-BL
FB : SVP592-FB-GY
HC : SVP592HC

※ The special product power male terminal is SVP592FB-GY.